



# Tyras

## CH-4700~CH-4731

Our Tyras fixtures are modern totally metal light units. We offer them in aluminum, brass, and stainless steel. They can be satin finished as shown in the chandelier photo, or we can make them polished brass, hammered stainless steel, or any variety of powercoat finishes you might need. They are just formidable light sources...totally indirect units able to bounce some very heavy foot candles off the ceiling above and walls beside. We offer great lamping options. Our LEDs can push foot candle levels way beyond what you might think of as normal. A stunning effect if needed!

### ~Tyras Series~

- Chandelier: CH-4700~CH-4731
- Pendant: PD-4700~PD-4731
- Ceiling Mount: CL-4700~CL-4708
- Wall Mount: SC-4700~SC-4711
- Bollard: BL-4700~BL-4711

**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



## Fixture Specifications

CH-47 / A  
 FIXTURE NUMBER (Example: CH-4700)    ARM QTY (Example: 4A)

DIFFUSER (Example: BGA-ECH)


METAL FINISH (Example: ABB)

VOLTAGE  
 (120V)  
 (277V)  
 (347V)

STEM=S+Lgth (Example: S-96")  
 CHAIN=C+Lgth (Example: C-96")  
 NR=Not required

OPTIONS (Example: DIM, REM)

MODIFICATIONS (Example: Custom Paint)  
 Use "Notes" Box At Top To Explain Modifications

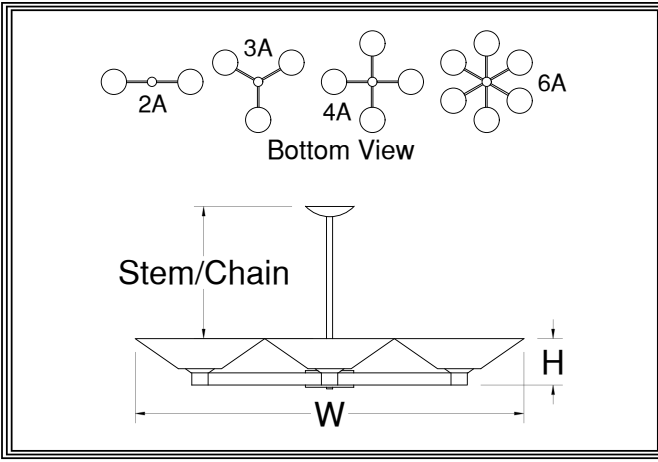

CH-47\_\_ / \_\_A  
 Fixture Number    Job Type

Job Name

Notes~Modifications

	Fixture Number ~ Arm Quantity	Dimensions	Lamps/Arm	Bowl	Wt/Arm	Stem/Chain	Options
LED	<input type="checkbox"/> CH-4709 / 2A,3A,4A,6A	36w x 7h	6-11wCLED	14w.4h	16 lbs	3' Std	DALI,TPL,FUS**
	<input type="checkbox"/> CH-4710 / 2A,3A,4A,6A	48w x 8h	6-13wCLED	16w.5h	18 lbs	6' Std	L423,L623
	<input type="checkbox"/> CH-4711 / 2A,3A,4A,6A	60w x 9h	6-23wCLED	20w.6h	20 lbs	9' Std	L423,L623
	<input type="checkbox"/> CH-4712 / 2A,3A,4A,6A	72w x 10h	6-38wCLED	24w.7h	22 lbs	9' Std	L623,L823
	<input type="checkbox"/> CH-4713 / 2A,3A,4A,6A	90w x 12h	6-52wCLED	30w.8h	26 lbs	12' Std	L623,L823
INCANDESCENT	<input type="checkbox"/> CH-4720 / 2A,3A,4A,6A	36w x 7h	3-60wA	14w.4h	12 lbs	3' Std	N250
	<input type="checkbox"/> CH-4700 / 2A,3A,4A,6A	48w x 8h	3-100wA	16w.5h	14 lbs	6' Std	N300
	<input type="checkbox"/> CH-4721 / 2A,3A,4A,6A	60w x 9h	4-100wA	20w.6h	16 lbs	9' Std	N300
	<input type="checkbox"/> CH-4701 / 2A,3A,4A,6A	72w x 10h	6-100wA	24w.7h	18 lbs	9' Std	N500
	<input type="checkbox"/> CH-4702 / 2A,3A,4A,6A	90w x 12h	6-150wA	30w.8h	22 lbs	12' Std	N500
FLUORESCENT	<input type="checkbox"/> CH-4730 / 2A,3A,4A,6A	36w x 7h	2-26wCFT	14w.4h	15 lbs	3' Std	DIM,TPL,FUS*
	<input type="checkbox"/> CH-4703 / 2A,3A,4A,6A	48w x 8h	4-32wCFT	16w.5h	17 lbs	6' Std	F242
	<input type="checkbox"/> CH-4731 / 2A,3A,4A,6A	60w x 9h	6-32wCFT	20w.6h	19 lbs	9' Std	F242
	<input type="checkbox"/> CH-4704 / 2A,3A,4A,6A	72w x 10h	6-42wCFT	24w.7h	21 lbs	9' Std	F442
	<input type="checkbox"/> CH-4705 / 2A,3A,4A,6A	90w x 12h	8-42wCFT	30w.8h	25 lbs	12' Std	F442

~Single Circuit Standard Wiring~

\*All CFL Fixtures  
 \*\*All LED Fixtures

~Bowls can be acrylic diffusers also~

DIFFUSER	<input type="checkbox"/> BGA: Beige Alabaster Acrylic	<input type="checkbox"/> GRA: Green Edge Acrylic	<input type="checkbox"/> ECH: Etched*
	<input type="checkbox"/> NHA: Natural Horn Acrylic	<input type="checkbox"/> EGA: Earth Green Acrylic	*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example: WOA-ECH)
	<input type="checkbox"/> WHA: White Alabaster Acrylic	<input type="checkbox"/> DGA: Deep Gold Acrylic	
	<input type="checkbox"/> HNA: Honey Alabaster Acrylic	<input type="checkbox"/> SBA: Sea Blue Acrylic	
	<input type="checkbox"/> WOA: White Opal Acrylic	<input type="checkbox"/> PHA: Purple Haze Acrylic	

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> SSS: Satin
	<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/> DSS: Distressed
	<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/> PSS: Polished
	<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/> HSS: Hammered
	<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/> CSS: Custom SS*
	<input type="checkbox"/>			<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>

OPTIONS	<input type="checkbox"/> N250: 250wPar38 Downlight	<input type="checkbox"/> L423: 4-23wCLED Downlight	<input type="checkbox"/> FUS: Fusing
	<input type="checkbox"/> N300: 300wPar56 Downlight	<input type="checkbox"/> L623: 6-23wCLED Downlight	<input type="checkbox"/> REM: Remote Emer.Ballast
	<input type="checkbox"/> N500: 500wPar56 Downlight	<input type="checkbox"/> L823: 8-23wCLED Downlight	<input type="checkbox"/> DALI: Dali dimming LED
	<input type="checkbox"/> DIM: Dimming Ballast	<input type="checkbox"/>	<input type="checkbox"/> F242: 2-42wCFT Downlight
	<input type="checkbox"/> TPL: Top Lens	<input type="checkbox"/>	<input type="checkbox"/> F442: 4-42wCFT Downlight
	<input type="checkbox"/>	<input type="checkbox"/>	