



Corbin

2701-PC~2716-PC

Our Corbin fixtures are a direct result of current architectural trends in the early 2010's. We show Corbin as an option for those auditoriums with significant ceilings looking for a tall slender fixture to integrate into the overall design. These lights stay thin. The pendants run from 30" to 82" in length while at the same time maintaining a consistent 9" diameter. They create plenty of light within that thin cylinder, and especially the downlight of the pendant version. The larger of the LEDs will produce almost 13,000 lumens of warm and quite powerful light to the floor.

~Corbin Series~

Chandelier:2741-CHC~2772-CHC

Pendant:2701-PC~2716-PC

Ceiling Mt:2704-CC~2717-CC

Wall Mt:2701-WC~2713-WC

S-Pendant:2703-SC~2715-SC

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

27____-PC

FIXTURE NUMBER
(Example: 2701-PC)


DIFFUSER
(Example: BGA-ECH)

OPTIONS

- L38: 38wLED R40 Downlight
- L52: 52wLED R40 Downlight
- L83: 83wLED R40 Downlight
- DIM: Dimming Driver (std)
- REM: Remote Emer.Driver

- L310: 3-10wLED A-lamp
- L610: 6-10wLED A-lamp
- L1210: 12-10wLED A-lamp

- SPR: Surge protector
- IEM: Integral Emer.Ballast

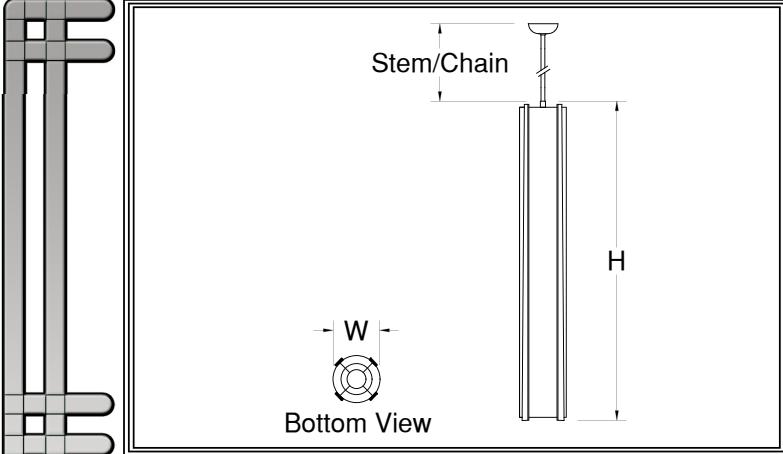

27____-PC

Fixture Number

Job Type

Job Name

Notes~Modifications

Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
<input type="checkbox"/> 2701-PC	9w x 30h	8-13wL(11280 lm)	29 lbs	3' Std	IEM,REM,SPR**
<input type="checkbox"/> 2702-PC	9w x 41h	1-38wC(5734 lm)	33 lbs	6' Std	
<input type="checkbox"/> 2703-PC	9w x 53h	12-13wL(16920 lm)/1-38wC(5734 lm)	42 lbs	9' Std	
<input type="checkbox"/> 2704-PC	9w x 64h	16-13wL(22560 lm)/1-52wC(9375 lm)	57 lbs	9' Std	
<input type="checkbox"/> 2705-PC	9w x 82h	20-13wL(28200 lm)/1-83wC(12597 lm)	71 lbs	12' Std	
 <input type="checkbox"/> LED		 6-60wA(4800 lm)	 24 lbs	 3' Std	 L38,L610
 <input type="checkbox"/> INCANDESCENT		 3-75wA(3600 lm)/1-250wP38(3600 lm)	 29 lbs	 6' Std	 L38,L310
 <input type="checkbox"/> FLUORESCENT		 6-75wA(7200 lm)/1-250wP38(3600 lm)	 38 lbs	 9' Std	 L38,L610
		 6-75wA(7200 lm)/1-500wR40(5000 lm)	 47 lbs	 9' Std	 L52,L610
		 12-75wA(14400 lm)/1-500wR40(5000 lm)	 62 lbs	 12' Std	 L83,L1210

~Two Circuits Standard Wiring~

**All LED Fixtures

<input type="checkbox"/> BGA: Beige Alabaster Acrylic	<input type="checkbox"/> GRA: Green Edge Acrylic	<input type="checkbox"/> ECH: Etched*
<input type="checkbox"/> NHA: Natural Horn Acrylic	<input type="checkbox"/> EGA: Earth Green Acrylic	*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)
<input type="checkbox"/> WHA: White Alabaster Acrylic	<input type="checkbox"/> DGA: Deep Gold Acrylic	
<input type="checkbox"/> HNA: Honey Alabaster Acrylic	<input type="checkbox"/> SOG: Streaked Opal Glass	
<input type="checkbox"/> WOA: White Opal Acrylic	<input type="checkbox"/> WOG: White Opal Glass	

SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> NA
<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/>
<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/>
<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/>
<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>

 <input type="checkbox"/> L38: 38wLED R40 Downlight	 <input type="checkbox"/> L310: 3-10wLED A-lamp	 <input type="checkbox"/> SPR: Surge protector
 <input type="checkbox"/> L52: 52wLED R40 Downlight	 <input type="checkbox"/> L610: 6-10wLED A-lamp	 <input type="checkbox"/> IEM: Integral Emer.Ballast
 <input type="checkbox"/> L83: 83wLED R40 Downlight	 <input type="checkbox"/> L1210: 12-10wLED A-lamp	
 <input type="checkbox"/> DIM: Dimming Driver (std)		
 <input type="checkbox"/> REM: Remote Emer.Driver		

 <input type="checkbox"/> FIXTURE NUMBER (Example: 2701-PC)	 <input type="checkbox"/> DIFFUSER (Example: BGA-ECH)	 <input type="checkbox"/> METAL FINISH (Example: ABB)	 <input type="checkbox"/> VOLTAGE (120V) (277V) (347V)	 <input type="checkbox"/> STEM+S+Lgth (Example:S-96")	 <input type="checkbox"/> CHAIN+C+Lgth (Example:C-96")	 <input type="checkbox"/> NR=Not required	 <input type="checkbox"/> OPTIONS (Example:DIM,REM)	 <input type="checkbox"/> MODIFICATIONS (Example:Custom Paint*) Use "Notes" Box At Top To Explain Modifications
---	---	---	--	---	--	--	---	--