

## Buckingham

## 201-PT~217-PT

Our Buckingham fixtures go well in colonial and contemporary churches. Their flowing strap crowns at top and optional opal glass panes are reminiscent of lanterns made at the turn of last century...and a little before. We put a unique cross at bottom to blend a touch of 1960's flavor into the lights. And the pyramid knobs at base sandwich the mixture of time periods. These lights come in a myriad of finishes. We show solid antique brass, but our deep bronze and gold finishes are to die for. Take advantage of our LED lamping options. Just right for high ceilings...relamp every 20 years.

## ~Buckingham Series~

Chandelier:241-CHT~273-CHT

## Pendant:201-PT~217-PT

Ceiling Mount:204-CT~217-CT

Wall Mount:201-WT~213-WT

S-Pendant:203-ST~215-ST


**Mounting:**Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.











2\_-PT
FIXTURE NUMBER
(Example: 201-PT)

DIFFUSER (Example: BGA-ECH)

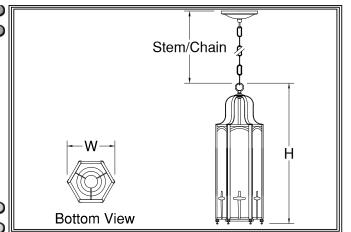



Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
	201-PT	10w x 20h	2-13wLled	12 lbs	3' Std	C,G,DALI,REM,FUS**
CED	202-PT	12w x 26h	4-13wLled/1-38wCled	14 lbs	6' Std	C,G,L423,L623
	203-PT	12w x 34h	6-13wLled/1-38wCled	18 lbs	9' Std	C,G,L423,L623,L311
	204-PT	14w x 42h	12-13wLled/1-52wCled	25 lbs	9' Std	C,G,L623,L823,L611
	205-PT	16w x 48h	18-13wLled/1-52wCled	31 lbs	12' Std	C,G,L623,L823,L611
	_					
INCANDESCENT	208-PT	10w x 20h	1-150wA	10 lbs	3' Std	C,G,N250
	210-PT	12w x 26h	3-75wA/1-250wP38	12 lbs	6' Std	C,G,N300
	212-PT	12w x 34h	6-75wA/1-250wP38	16 lbs	9' Std	C,G,N300
CAN	214-PT	14w x 42h	6-75wA/1-500wR40	20 lbs	9' Std	C,G,N500
	216-PT	16w x 48h	9-75wA/1-500wR40	27 lbs	12' Std	C,G,N500
	_					
FLUORESCENT	209-PT	10w x 20h	1-42wCFT	11 lbs	3' Std	C,G,DIM,IEM,FUS*
	211-PT	12w x 26h	2-42wCFT/2-42wCFTdn	13 lbs	6' Std	C,G,L311
	213-PT	12w x 34h	4-42wCFT/2-42wCFTdn	17 lbs	9' Std	C,G,L311
	215-PT	14w x 42h	6-FT40w/4-42wCFTdn	24 lbs	9' Std	C,G,L611
	217-PT	16w x 48h	6-FT50w/4-42wCFTdn	29 lbs	12' Std	C,G,L611
			~Two Circuits Standard Wiring~			*All I ED Fixtures

	~ I wo Circuits Standard Wiring~											*All Fluorescent Fixtures  **All LED Fixtures			
DIFFUSER		NHA: <u> </u> WHA: <u> </u> HNA: <u> </u>	BGA: Beige Alabaster Acrylic NHA: Natural Horn Acrylic WHA: White Alabaster Acrylic HNA: Honey Alabaster Acrylic WOA: White Opal Acrylic				GRA: Green Edge Acrylic EGA: Earth Green Acrylic DGA: Deep Gold Acrylic SOG: Streaked Opal Glass WOG: White Opal Glass					*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)			
METAL FINISH		ABB: // SBB: SPBB:	RASS FINIS Antique I Satin Bra Polished Antique I Satin Nic Polished Antique I Satin Ric Polished Custom I	Brass Brass Nickel kel Nickel Bronze Dnze Bronze		DGP: VGP: CGP: MBP: SBP: DBP: LBP: MGP:	Satin B Dark B Light B Mediun	reen Green al Gray n Bronze lack ronze ronze n Gold d Copper		ALUMINUM SAA: Sati SNA: Sati PAA: Polis PAA: Polis BBA: Burr RNA: Red SGA: Sati SBA: Sati ORA: Oil R SCA: Sati CSA: Cust	n Alur n Nick hed Alu hished I Naval n Gold n Broi Rubbed n Cop	ninum iel iminum Bronze Bronze inze Bronze Bronze coer		SSS: DSS: PSS: HSS:	Satin Distressed Polished Hammered
OPTIONS	N250: 250wPar38 Downlight N300: 300wPar56 Downlight N500: 500wPar56 Downlight DIM: Dimming Ballast REM: Remote Emer.Ballast						L611: 6-11wCled Uplight					FUS: Fusing IEM: Integral Emer.Ballast DALI: Dali dimming LED C: "C" Arch Option G: "G" Arch Option			
~			~			~		~				~			

STEM=S+Lgth

(Example:S-96")

CHAIN=C+Lgth

(Example:C-96"

NR=Not required

**OPTIONS** 

(Example:DIM,REM)



MODIFICATIONS

(Example:Custom Paint\*)

Use "Notes" Box At Top To

Explain Modifications

VOLTAGE

(120V)

(277V)

(347V)

METAL FINISH

(Example: ABB)