



**Whitby**

**2301-PT~2316-PT**

Our Whitby series is a traditional fixture featuring both gothic and colonial motifs. The pendants are especially tall with a distinct curving top hexagonal lens that is meant to resemble the Florence Brunelleschi Cathedral dome in shape and scale. Side ornamentation is both colonial organic and early European gothic. As a complete series, the Whitby line is meant to be a perfect compliment to a wide range of traditional interiors. We offer Whitby in ceiling, wall, pendant, and even hanging lantern versions. The lights come in modular LED as well as screw-in LED versions.

**~Whitby Series~**

Chandelier:2341-CHT~2373-CHT

Pendant:2301-PT~2316-PT

Ceiling Mt:2304-CT~2317-CT

Wall Mt:2301-WT~2313-WT

S-Pendant:2303-ST~2315-ST

**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



**Fixture Specifications**

**23 -PT**  
FIXTURE NUMBER  
(Example: 2301-PT)

~ **DIFFUSER**  
(Example: BGA-ECH)


~ **METAL FINISH**  
(Example: ABB)

~ **VOLTAGE**  
 (120V)  
 (277V)  
 (347V)

~ **STEM=**S+Lgth  
(Example: S-96")  
**CHAIN=**C+Lgth  
(Example: C-96")  
NR=Not required

~ **OPTIONS**  
(Example: DIM, REM)

~ **MODIFICATIONS**  
(Example: Custom Paint)  
Use "Notes" Box At Top To Explain Modifications

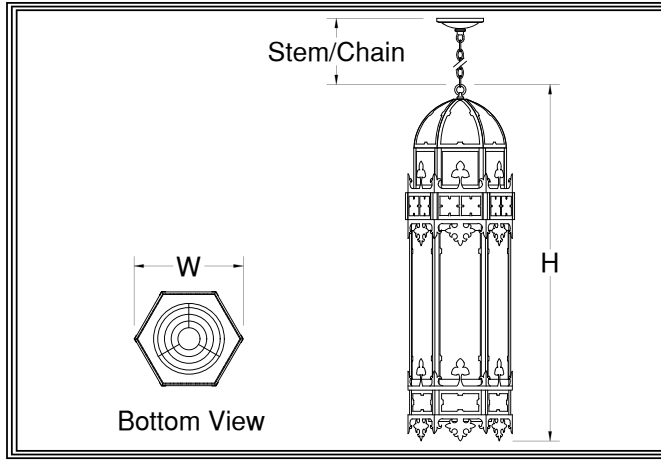

**23 -PT**  
Fixture Number      Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
LED	<input type="checkbox"/> 2301-PT	8w x 26h	2-13wL(2820 lm)	17 lbs	3' Std	IEM, REM, SPR**
	<input type="checkbox"/> 2302-PT	10w x 33h	4-13wL(5640 lm)/1-38wC(5734 lm)	20 lbs	6' Std	L313
	<input type="checkbox"/> 2303-PT	12w x 39h	6-13wL(8460 lm)/1-38wC(5734 lm)	26 lbs	9' Std	L313
	<input type="checkbox"/> 2304-PT	14w x 46h	12-13wL(16920 lm)/1-52wC(9375 lm)	36 lbs	9' Std	L323
	<input type="checkbox"/> 2305-PT	16w x 55h	12-13wL(16920 lm)/1-83wC(12597 lm)	45 lbs	12' Std	L323
INCANDESCENT	<input type="checkbox"/> 2308-PT	8w x 26h	1-150wA(1200 lm)	14 lbs	3' Std	L38
	<input type="checkbox"/> 2310-PT	10w x 33h	3-75wA(3600 lm)/1-250wP38(3600 lm)	17 lbs	6' Std	L52, L310
	<input type="checkbox"/> 2312-PT	12w x 39h	6-75wA(7200 lm)/1-250wP38(3600 lm)	23 lbs	9' Std	L52, L610
	<input type="checkbox"/> 2314-PT	14w x 46h	6-75wA(7200 lm)/1-500wR40(5000 lm)	29 lbs	9' Std	L83, L610
	<input type="checkbox"/> 2316-PT	16w x 55h	9-75wA(10800 lm)/1-500wR40(5000 lm)	39 lbs	12' Std	L83, L910
FLUORESCENT	<input type="checkbox"/>					

~Two Circuits Standard Wiring~

\*\*All LED Fixtures

DIFFUSER	<input type="checkbox"/> <b>BGA:</b> Beige Alabaster Acrylic	<input type="checkbox"/> <b>GRA:</b> Green Edge Acrylic	<input type="checkbox"/> <b>ECH:</b> Etched*
	<input type="checkbox"/> <b>NHA:</b> Natural Horn Acrylic	<input type="checkbox"/> <b>EGA:</b> Earth Green Acrylic	*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example: WOA-ECH)
	<input type="checkbox"/> <b>WHA:</b> White Alabaster Acrylic	<input type="checkbox"/> <b>DGA:</b> Deep Gold Acrylic	
	<input type="checkbox"/> <b>HNA:</b> Honey Alabaster Acrylic	<input type="checkbox"/> <b>SOG:</b> Streaked Opal Glass	
	<input type="checkbox"/> <b>WOA:</b> White Opal Acrylic	<input type="checkbox"/> <b>WOG:</b> White Opal Glass	

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> <b>ABB:</b> Antique Brass	<input type="checkbox"/> <b>DGP:</b> Dark Green	<input type="checkbox"/> <b>SAA:</b> Satin Aluminum	<input type="checkbox"/> <b>SSS:</b> Satin
	<input type="checkbox"/> <b>SBB:</b> Satin Brass	<input type="checkbox"/> <b>VGP:</b> Verde Green	<input type="checkbox"/> <b>SNA:</b> Satin Nickel	<input type="checkbox"/> <b>DSS:</b> Distressed
	<input type="checkbox"/> <b>PBB:</b> Polished Brass	<input type="checkbox"/> <b>CGP:</b> Charcoal Gray	<input type="checkbox"/> <b>PAA:</b> Polished Aluminum	<input type="checkbox"/> <b>PSS:</b> Polished
	<input type="checkbox"/> <b>ANB:</b> Antique Nickel	<input type="checkbox"/> <b>MBP:</b> Medium Bronze	<input type="checkbox"/> <b>BBA:</b> Burnished Bronze	<input type="checkbox"/> <b>HSS:</b> Hammered
	<input type="checkbox"/> <b>SNB:</b> Satin Nickel	<input type="checkbox"/> <b>SBP:</b> Satin Black	<input type="checkbox"/> <b>RNA:</b> Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>PNB:</b> Polished Nickel	<input type="checkbox"/> <b>DBP:</b> Dark Bronze	<input type="checkbox"/> <b>SGA:</b> Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> <b>AZB:</b> Antique Bronze	<input type="checkbox"/> <b>LBP:</b> Light Bronze	<input type="checkbox"/> <b>SBA:</b> Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>SZB:</b> Satin Bronze	<input type="checkbox"/> <b>MGP:</b> Medium Gold	<input type="checkbox"/> <b>ORA:</b> Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>PZB:</b> Polished Bronze	<input type="checkbox"/> <b>SCP:</b> Sponged Copper	<input type="checkbox"/> <b>SCA:</b> Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> <b>CSB:</b> Custom Brass*	<input type="checkbox"/> <b>CSP:</b> Custom Paint*	<input type="checkbox"/> <b>CSA:</b> Custom Aluminum*	<input type="checkbox"/> <b>CSS:</b> Custom SS*

OPTIONS	<input type="checkbox"/> <b>L38:</b> 38wLED R40 Downlight	<input type="checkbox"/> <b>L313:</b> 3-13wCLED Uplight	<input type="checkbox"/> <b>SPR:</b> Surge protector
	<input type="checkbox"/> <b>L52:</b> 52wLED R40 Downlight	<input type="checkbox"/> <b>L323:</b> 3-23wCLED Uplight	<input type="checkbox"/> <b>IEM:</b> Integral Emer.Ballast
	<input type="checkbox"/> <b>L83:</b> 83wLED R40 Downlight	<input type="checkbox"/> <b>L310:</b> 3-10wLED A-lamp	<input type="checkbox"/>
	<input type="checkbox"/> <b>DIM:</b> Dimming Driver (std)	<input type="checkbox"/> <b>L610:</b> 6-10wLED A-lamp	<input type="checkbox"/>
	<input type="checkbox"/> <b>REM:</b> Remote Emer.Driver	<input type="checkbox"/> <b>L910:</b> 9-10wLED A-lamp	<input type="checkbox"/>